

# edek<sup>TM</sup> engineered jarrah decking



**edek<sup>TM</sup> "the responsible design choice."** Introducing a new eco-friendly decking solution. Edek<sup>TM</sup> is an engineered, precision machined Jarrah decking which is guaranteed to give superior strength and stability. Both faces and sides of Edek<sup>TM</sup> come pre-oiled in "Machine Colour Guard" for optimum durability. After installation, one coat of decking oil will need to be applied to the upper surface (face board only). Edek<sup>TM</sup> comes from WA government managed sustainable forests. Jarrah is a **premium** decking medium as well as being one of the hardest and most durable timbers known.

**Sizes**  
**edek<sup>TM</sup>** available in 86 x 20mm and 137 x 20mm size boards.  
3.6 / 4.5 / 5.4 metre set lengths.

**Profile**  
**edek<sup>TM</sup>** available in the following profile:  
PR4E – Pencil Round 4 Edges (dressed both faces).  
Pre-grooved (both sides) option to suit secret fixing.

**Testing**  
**edek<sup>TM</sup>** independently tested at University of Western Australia School of Civil & Resource Engineering Testing Laboratory.  
NATA Certificate upon request.

- ✓ eco-friendly
- ✓ pre-oiled
- ✓ maintains structural integrity
- ✓ engineered rating
- ✓ suitable for secret fixing
- ✓ extremely durable
- ✓ sustainable timber
- ✓ superior strength
- ✓ consistent quality
- ✓ set length (minimal waste)

## Features

- Pre-oiled
- Made by value adding wood waste & shorts producing a premium product
- Available in 2 Sizes – 86 x 20mm & 137 x 20mm
- Set Lengths - 3.6 / 4.5 / 5.4 mtr lengths (suits 450 centres)
- PR4E (Pencil Round 4 Edges)
- Environmentally friendly - manufactured from quality sustainable timber; WA Government controlled
- Can be nailed, screwed or secret fixed
- Profiled for secret fixing (upon request)
- KD to 12-14% MC (Moisture Content)



## Benefits

- Do not have to oil prior to installation
- Cost savings in labour & materials as already pre oiled
- Pre oiled for dimensional stability
- Dead straight
- Class 2 durability
- Engineered - Class A adhesion join



**Maintenance:** Just as with all timber decks, edek<sup>TM</sup> will require additional coats of decking oil in the 1st year. Apply 3 additional coats within 12 month period. Thereafter, for optimum good looks + durability, regular applications of decking oil is required. **Tip:** If the deck starts to look "dry" this is the time to re-oil.

FQ....committed to a **Greener Future!**

**FQ**  
Fine Quality  
[www.fqtimber.com](http://www.fqtimber.com)



# Introducing **e**co-friendly **e**ngineered Jarrah bench tops, stair treads + posts.

## **e**Jarrah

"the responsible design choice"

Introducing eco-friendly work tops/ stair tread and posts. Engineered precision machined Jarrah which is guaranteed to give superior strength and stability.

## **e**bench tops

Available: 3000 x 300mm wide  
[41mm depth]

## **e**stair treads

Available: 3000 x 300mm wide  
[41mm depth]

e bench tops & stair treads are not pre-oiled; can be finished with either oil or varnish.

## **e**Jarrah

manufactured by value adding wood waste + shorts producing a premium product.


## **e**posts **pre-oiled**

Available: 120 x 120mm  
2.4/3.0/3.6/5.4 length options  
Suitable for internal + external applications.

**e**Jarrah comes from independently certified, WA government managed, sustainable forests. Jarrah meets the rigorous demands of the **Australian Forestry Standard**.



\*  
Engineered - class A adhesion join  
[50 x 25mm Jarrah laminates]

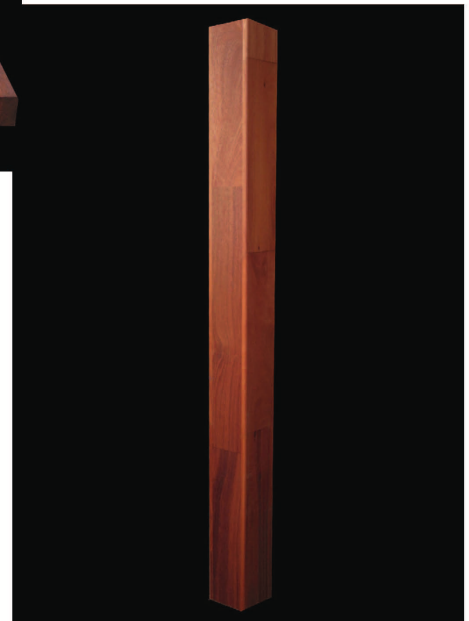

Engineered - pre-oiled, solid jarrah posts guaranteed superior strength + stability  
\*Insitu images for illustration purpose only.

### Maintenance

Just as with all timber used in external applications eposts will require additional coats of decking oil in the 1st year. Apply 3 additional coats within 12 month period. Thereafter, for optimum good looks + durability, regular applications of decking oil is required.

**Tip:** If the timber starts to look "dry" this is the time to re-oil.

FQ....committed to a **Greener Future!**

FQ: Fine Quality Timber Sdn Bhd  
Lot 5200, Tmn. Perindustrian Balakong Jaya,  
43300 Seri Kembangan, Selangor Darul Ehsan,  
Malaysia.

[www.fqtimber.com](http://www.fqtimber.com)

Phone: (+603) 8961 1677  
Fax: (+603) 8961 1688  
Email: [info@fqtimber.com](mailto:info@fqtimber.com)

**FQ**  
Fine Quality  
[www.fqtimber.com](http://www.fqtimber.com)